
HAIKU COASTAL

The world's first and only wet-rated, salt-resistant, and storm-ready outdoor ceiling fan, Haiku Coastal delivers superior performance and uncompromising durability in the saltiest, windiest, warmest, wettest, and wildest environments on earth. The end result? A product and promise no other fan company can make: A nearly unbreakable piece of art that performs like a beast from the sea no matter what Mother Nature has in store.



KEY FEATURES

- Three ultra-durable, faderesistant airfoils in matte black or white
- Airfoil retention system and fan stabilizer to prevent damage and wobble in high winds
- Handheld remote control and optional mobile app with seven speed settings for unmatched convenience and comfort
- Sealed electronics, LED light, and canopy with corrosionresistant stainless steel hardware
- Industry-leading 3-year warranty with salt exposure coverage
- Passed Category 5 hurricane wind test, salt exposure test, dust test, and water spray test

52 INCHES
(132 CM)

– MOUNTING -

UNIVERSAL

- CONTROL -

- IR REMOTE - MOBILE APP - 0-10 V - BLUETOOTH WALL CONTROL - VOICE INTEGRATION - WARRANTY -

3 YEARS




DISCOVER MORE ABOUT HAIKU COASTAL

Learn more at **bigassfans.com/haiku-coastal** or call **877.BIG.FANS** for a free custom quote.

HAIKU® COASTAL

THE WORLD'S FIRST AND ONLY STORM-READY FAN



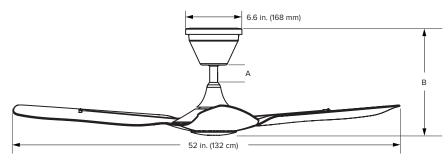

Pictured with 5 in. (128.5 mm) downrod¹

Downrod Lengths							
Danner d (A)1	Included	Optional					
Downrod (A) ¹	5 in. (128.5 mm)	10 in. (256 mm)	22 in. (561 mm)	34.8 in. (884 mm)	50.8 in. (1291 mm)	62.8 in. (1595 mm)	
Fan Height (B)	11.5 in. (289 mm)	16.4 in. (417 mm)	28.4 in. (721 mm)	41.1 in. (1044 mm)	57.1 in. (1451 mm)	69 in. (1755 mm)	
Ceiling Height	≥8 ft (≥ 2.4 m)	≥9 ft (≥ 2.7m)	≥10 ft (≥3 m)	≥11 ft (≥3.4 m)	≥12 ft (≥3.7 m)	≥13 ft (≥4 m)	

Fan Specifications								
Diameter	CFM (Max)	Speed (Min/Max)	Watts (Max)	Environment ²	Input Power	Packaged Dimensions and Weight	Fan Weight	Sound Level ³
52 in. (132 cm)	6,553 CFM	36/202 RPM	26.7 W	UL Wet Rated for outdoor use IP56	100–240 VAC, 50/60 Hz, 1 Ф	27-3/8 in. L x 11-1/8 in. W x 9-3/8 in. H (695 mm L x 283 mm W x 238 mm H) 17.4 lb (7.9 kg)	14.2 lb (6.4 kg)	<35 dBA at max speed

Light Specifications				
Color Temp	CRI			
2700 K	90			


Construction Features						
Airfoils	Motor	Controls	Integrated LED Light	Mounting	Optional Accessories	
UV-resistant hybrid resin construction Stainless steel retention cables secure and stabilize airfoils	High-efficiency, brushless EC motor Sealed bearings and electronics	Handheld remote Bluetooth wall control Big Ass Fans mobile app ⁴ Voice control ⁴ 0–10 V	Sealed for protection against moisture Settings include on/off and 16 dimmable light levels	Flat ceilings 8 ft (2.4 m) or taller Covered mounting bracket protects against debris and moisture Fan stabilizer restricts movement in high wind conditions	Bluetooth wall control 0–10 V module Extended length downrods	

Ordering Information				
Matte Black	Matte White			
MK-HKC1-042506A258F258I05S2	MK-HKC1-042506A824F824I05S2			



Remote





Optional downrod lengths packaged separately. Lengths in inches are rounded to the nearest whole number.

Wet-rated fans installed in exposed outdoor locations must have fixed/permanent coverage above the fan wiring cover. The included fan stabilizer must be installed. Suitable for salt air environments. Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.

Requires a Wi-Fi network. Voice control requires an Amazon Alexa-enabled device or the Google Assistant.







